

Innovation | Technology | Precision



*The name you can trust*






Newtronic Lifecare Equipment Pvt. Ltd.  
[www.newtronic.in](http://www.newtronic.in)

**Manufacturer of** Stability Chambers | Walk-In Chambers | Peltier Technology  
Low Temperature Chambers | Ultra Low Temperature Chambers | Incubators | Ovens  
Clean Room Equipment | Laboratory Equipment | Web Based Software

# WELCOME TO THE WORLD OF NEWTRONIC:

*The name you can trust*

- ◆ Established in 1980
- ◆ Manufacturing facility of over 60,000 sq. ft.
- ◆ Globally available superior quality components
- ◆ PLC-based/IOT-based controlling systems
- ◆ Web-based software to access the chambers from anywhere, anytime
- ◆ Installation of more than 15,000 Chambers
- ◆ Large-sized chambers of upto 1 Million Litre capacity
- ◆ Execution of a single order of Walk-In Stability Chambers worth ₹12 Crore  
◆ (approx. \$1.4 Million USD).

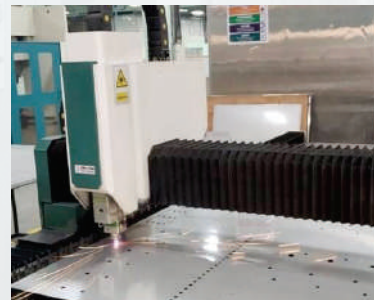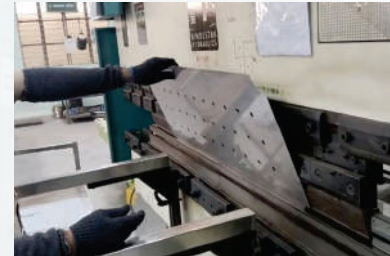

# STATE OF THE ART PLANT - UMBERGAON



## .... our key to excellence

Innovation | Technology | Precision

Consistent focus on strengthening our infrastructure has ensured that we now have a state-of-the-art factory at Umbergaon; PAN-India branch network; Channel Partners across major countries; Strong Supplier network; structured on-field operations and adoption of latest technology platforms - SAP being one of them.

Innovation has been a key factor to market penetration and at NEWTRONIC, we make it a habit. Driving innovation to meet customer expectations and bring operational efficiencies have always been part of our GTM strategies.

We are equally conscious that setting up a strong & effective team across all functional areas is imperative to the success of an organization. NEWTRONIC has always paid special attention to every minor detail across its complete ecosystem - employees; channel partners and our customers.

Furthermore, our customer relations have been the pedestal of our success. The strong relations forged with them run into decades and have stood the test of time on multiple occasions.

With a clear focus on our vision, mission and goals, we are committed to define & refine strategies that propel our growth in the future.

# STABILITY CHAMBERS | CUSTOM DESIGN & VALIDATION


## Specialized Design to meet Specific Needs



### Fine Interior with specialised key features

- Complete Stability Solutions
- One-stop supplier for stability chambers
- Chambers built to last longer and to meet all requirements-now and in future
- Chambers from 200 liters to 2,50,000 liters as well as customised ones

## Determination of Uniformity

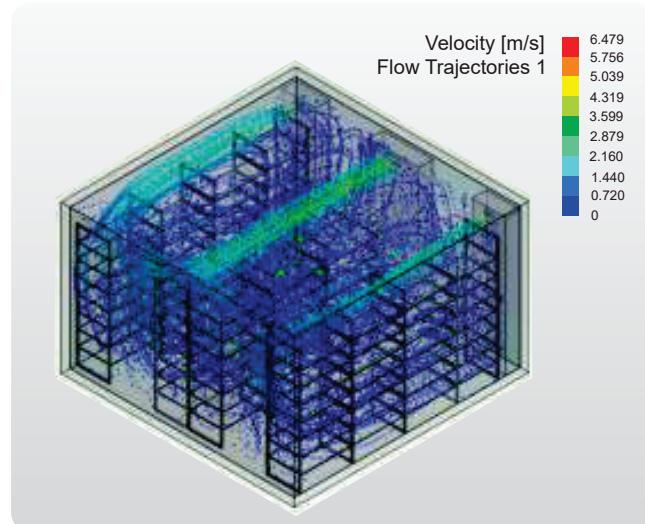

- Air Flow Stimulation Software
- Ensures uniformity of the conditions
- Determines an accurate air-path
- Determines the Hot & Cold Zones; Dry & Humid Zones
- Facilitates a proper sample loading pattern

## Application

Newtronic chambers are suitable to meet the regulatory requirements of the various international bodies such as (ICH, USFDA, MHRA, WHO, EU-GMP, TGA, JPMMA, ANVISA, ASEAN) or any of the other National Testing Standards.

The ICH Q1A(R2) & Q1B conditions for different application are as follows:

Application	Study	Conditions	Study Point
General Conditions	<b>Long Term*</b>	25°C ± 2°C / 60% RH ± 5% RH 30°C ± 2°C / 65% RH ± 5% RH 30°C ± 2°C / 75% RH ± 5% RH	12 months
	<b>Accelerated</b>	40°C ± 2°C / 75% RH ± 5% RH	06 months
Drug Products packed in Semi-permeable container	<b>Long Term*</b>	25°C ± 2°C / 40% RH ± 5% RH 30°C ± 2°C / 35% RH ± 5% RH	12 months
	<b>Intermediate</b>	30°C ± 2°C / 65% RH ± 5% RH	06 months
	<b>Accelerated</b>	40°C ± 2°C / NMT 25% RH	06 months
Drug Products for storage in Refrigerator	<b>Long Term*</b>	5°C ± 3°C	12 months
	<b>Accelerated</b>	25°C ± 2°C / 60% RH ± 5% RH	06 months
Drug Products intended for storage in a Freezer	<b>Long Term*</b>	-20°C ± 5°C	12 months
MVTR - Moisture Vapor Transmission Rate	-	23°C / 75% RH 25°C / 80% RH	
ICH Q1 B	<b>Photostability</b>	Exposure to Light intensity of 1.2 million Lux Hours & UV Light intensity of 200 watt / sq. mtr.	

\*If 30°C / 65% RH or 30°C / 35% RH is the long-term then there is no intermediate.

# Features | Functions | Flexibility



## Ethernet Communication:

- High-speed data transfer
- Global standard for communication protocol
- Data Operations from any PC over the LAN



## 2nd Generation I-Series Controllers

### No Data Loss:

- Data Storage of 1000 reading on the Controller itself
- At an interval of 30 mins, data upto 20 days is stored on the Controller itself.



## Touch Screen Display

- All operations through a 7" Color touch screen display
- PLC IP Address setting
- Component Working Hours
- Stand by system change over
- Password protection for set values and calibration mode
- User manual, Troubleshooting and Preventive Maintenance procedure
- Alarms recordings



## Touch Screen Door Access System

- Both Password-based and Biometric based access control
- Restricts access to unauthorized persons



## Humidity System

- Non-condensing Steam injection ( Reach -Ins & small capacity Walk-Ins)
- Principles of Dew Point Control (Walk-Ins)



## Standby Humidity & Cooling Systems

- Completely ready-to-use system
- Automatic switch-over upon failure of primary system
- Switch-over also upon detection of HP/LP & Internal faults
- Scheduled & manual change-overs
- Booster Cooling for faster recovery
- Recording of all change - overs in the software



## Complete Range of Alarms

- Temperature & Humidity Deviations
- Door Opening
- Water Supply Failure
- Component Failure
- Mains Failure



## Alarm Transmissions

- To Software
- To Remote Location ( such as Security Gate)
- Through detailed SMS Notification
- Locally at equipment ( audio-visual indication & on the display)




## Mobile Alert System

- Time of Alarm transmission
- Name of Equipment
- Transmitted Message ( Equipment Name, Alarm time, Type of Alarm & Limits.)



## Safety

- Temperature Overshoot/Undershoot
- Low water-level
- Delay Timer to safeguard the Compressor
- MCB to cut-off over-current supply
- Standby Controlling Sensor upon failure of Primary
- In Walk-in chambers door can be opened from inside
- Emergency Bell switch inside the chamber



## Multiple Sensors

- Either 4 or 8 probes can be placed
- Helps study the distribution in the different location of the chamber
- Works as an auto-validation system
- Easy detection of drift in the sensors
- Helps determine the variation in conditions by changes in sample - loading pattern



## Documentation & Training

- DQ, IQ, OQ, PQ, & SOP & Operational Manuals
- Calibration Certificates
- GA & Electrical Drawings
- Material test Certificates
- Training to end-users



## Audit Support

- Quick Resolution to NCs
- Justification to Excursion
- On-site Support
- Remote Support via Team Viewer
- Documentation

**PRECISE CONTROL WITH DIVERSE APPLICATION**

Temperature Range: 20°C to 60°C  
 Humidity Range: 40% Rh to 95% Rh

# Stability Chamber

## Standard Equipment

- Double walled with PUF insulation.
- SS304 Interior & Exterior either SS304 or Mild Steel
- Full-length inner glass door & metal door with gasket & lock on the outside
- Forced air circulation for uniform temperature
- PU wheels for easy movement
- U-shaped SS tubular heaters
- Non-Condensing Humidity System with Standby system and booster humidification feature
- Complete Operations driven through PLC with data logging capacity of upto 1000 readings
- All operations through a single 7" Color Touch Screen
- High quality imported make T/Rh combo sensor with 4-20 mA output
- Safety devices: Low & high temperature cut-off settable thermostats
- Audio/Visual alarms for deviations
- Complete with DQ, IQ, OQ, PQ & SOP & Operational Manual

## With Refrigeration Technology

- CFC free cooling system consisting of hermetically sealed compressor coupled with evaporation coil & condenser

## Without Refrigeration Technology

- Cooling achieved by a thermoelectric module based on the principles of Peltier Technology

**Power Supply:** 230 volts 50 Hz main supply. Also available with 60 Hz Cycle.



## SPECIFICATIONS

- Temperature Range : 20°C to 60°C
- Temperature Accuracy : ± 0.5°C
- Temperature Uniformity : ± 1°C
- Humidity Range : 40% Rh to 95% Rh
- Humidity Accuracy : ± 2% Rh
- Humidity Uniformity : ± 3% Rh

## Optional Accessories

- ICDAS - A Single Software installation for all Newtronic make equipments
- 4 pt. Temperature & Humidity Scanner
- Door Access system (Numeric or Biometric)
- Remote alarm system suitable for upto 4 nos. Newtronic make equipments
- Mobile Alert System

## ◆ Selection Guide

Model	Capacity		Internal Size (H*W*D) mm	External Size (H*W*D) mm	Trays Qty.	Trays Size (W*D) mm	Approx. Weight (Kg)	
	CuFt.	Liter					Equip.	Ship.
NLHC16SI	16	430	1200 x 600 x 600	1715 x 760 x 1155	4	530 x 560	200	340
NLHC26SI	26	735	1500 x 700 x 700	2070 x 860 x 1255	5	630 x 660	270	450
NLHC34SI	34	1000	1500 x 800 x 800	2070 x 960 x 1355	5	730 x 760	325	550
NLHC54SI	54	1500	1500 x 1600 x 600	2070 x 1760 x 1155	10	695 x 560	350	750
NLHC71SI	71	2000	1500 x 1600 x 800	2070 x 1760 x 1355	10	695 x 760	360	800

\*To quote for Peltier Models, suffix your chosen model number with "P"


\* Newtronic reserve the rights to change the product specifications without prior notice.

Features



Temperature Range: 10°C to 40°C

# Photostability Chamber

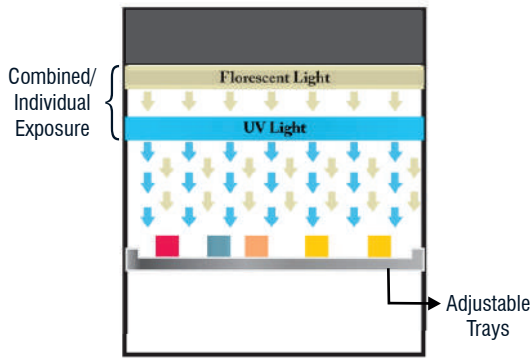

## Small, Efficient, Sufficient



### Standard Equipment

- Double walled with PUF insulation
- SS304 Interior & Exterior either SS304 or Mild Steel. **Additionally Interior walls are flushed with mirrors**
- Stainless Steel trays
- Full-length inner glass door, metal door with gasket & lock on the outside.
- Forced air circulation for uniform temperature
- PU wheels for easy movement
- White LED light fitted on the top of the inner chamber to provide illumination & produce visible light measured in lux
- UV light of wavelength 365nm (measured in watt/sq. m.) fitted on top of the chamber
- U-shaped SS tubular heaters.
- CFC free cooling system consisting of hermetically sealed compressor coupled with evaporation coil & condenser.
- Complete Operations driven through PLC with data logging capacity of upto 1000 readings
- High speed Ethernet based communication.
- All operations through a single 7" Color Touch Screen.
- High-quality PT-100 Temperature sensor.
- Safety devices: Low & high temperature cut-off settable thermostats.
- **Safety thermostat switches off the lights upon temperature overshoot.**
- **Automatic switch off of UV lights upon door opening.**
- Audio/Visual alarms for deviations.
- Complete with DQ, IQ, OQ, PQ & SOP & Operational Manual

**Power Supply:** 230 volts 50 Hz main supply. Also available with 60 Hz Cycle.

**\*Also available: Photostability Chambers with Humidity control**

### SPECIFICATIONS

- Temperature Range : 10°C to 40°C
- Temperature Accuracy : ± 0.5°C
- Temperature Uniformity : ± 1°C

### Optional Accessories

- ICDAS -A Single Software installation for all Newtronic make equipments
- LUX and UV meter
  - Hand held OR
  - Real-time measurement by inbuilt sensor
- Door Access System (Numeric or Biometric)
- Remote alarm system suitable for upto 4 nos. Newtronic make equipment
- Mobile Alert System

### ◆ Selection Guide

Model	Capacity		Internal Size (H*W*D) mm	External Size (H*W*D) mm	Trays Qty.	Trays Size (W*D) mm	Approx. Weight (Kg)	
	CuFt.	Liter					Equip.	Ship.
NLPS4SI	4	100	450 x 450 x 480	930 x 700 x 755	1	410 x 440	125	250
NLPS8SI	8	227	600 x 630 x 600	1410 x 790 x 1055	1	580 x 560	185	325
*NLPSH8SI	8	227	600 x 630 x 600	1410 x 790 x 1075	1	580 x 560	195	335

\* Newtronic reserve the rights to change the product specifications without prior notice.



Temperature Range: 20°C to 60°C  
 Humidity Range: 40% Rh to 95% Rh

# Walk-In Stability Chamber

## Standard Equipment



- Chamber Operations based on Ecotronic system incorporating the principles of Dew point control as per the Psychrometric Chart
- Double walled with 60mm PUF insulated modular panels with easy on-site assembly
- SS304 Interior & Exterior either SS304 or Pre Coated GI
- Stainless Steel Trays
- Observation window - 450 x 300 mm
- PVC strip curtain for reducing temperature leakages
- Heater line along the door to avoid condensation
- U-shaped SS tubular heaters
- Forced air circulation for uniform temperature
- CFC free cooling system consisting of hermetically sealed compressor coupled with evaporation coil & condenser
- System is made up of split type condenser unit in well-ventilated area to avoid throw of hot air in the room
- Stand by humidity system with booster humidification
- Complete Operations driven through PLC with data logging capacity of upto 1000 readings
- High speed Ethernet based communication
- All operations through a single 7" Color Touch Screen
- High quality imported make T/Rh combo sensor with 4-20 mA output
- Safety devices: Low & High temperature cut-off settable thermostats
- Audio/Visual alarms for deviations
- Complete with DQ, IQ, OQ, PQ & SOP & Operational Manual



**Power Supply:** 230/415 volts 50 Hz main supply. Also available with 60 Hz Cycle.

## SPECIFICATIONS

- Temperature Range : 20°C to 60°C
- Temperature Accuracy : ± 0.5°C
- Temperature Uniformity : ± 1°C
- Humidity Range : 40% Rh to 95% Rh
- Humidity Accuracy : ± 2% Rh
- Humidity Uniformity : ± 3% Rh

## Optional Accessories

- ICIDAS -A Single Software installation for all Newtronic make equipments
- 8 pt. Temperature & Humidity Scanner
- Stand by Cooling System with auto switch over
- Door Access system (Numeric or Biometric)
- Remote alarm system suitable for upto 4 nos. Newtronic make equipments
- Mobile Alert System

## ◆ Selection Guide

Model	Capacity		Internal Size (H*W*D) mm	External Size (H*W*D) mm	Trays Qty.	Trays Size (W*D) mm
	CuFt.	Liter				
NLWH208SI	208	5,848	2000 x 1360 x 2150	2120 x 1480 x 2270	20	900 x 300
NLWH250SI	250	7,017	2400 x 1360 x 2150	2520 x 1480 x 2270	28	900 x 300
NLWH307SU	307	8,600	2000 x 2000 x 2150	2120 x 2120 x 2270	20	900 x 600
NLWH368SU1	368	10,320	2400 x 2000 x 2150	2520 x 2120 x 2270	28	900 x 600
NLWH543SU	543	15,216	2400 x 2000 x 3170	2520 x 2120 x 3290	42	900 x 600
NLWH679SU	679	19,020	2400 x 2500 x 3170	2520 x 2620 x 3290	42	900 x 800
NLWH1092SU1	1092	30,600	2400 x 2500 x 5100	2520 x 2620 x 5220	70	900 x 800
NLWH1787SU1	1787	50,040	3000 x 4000 x 4170	3120 x 4120 x 4290	126	900 x 600
NLWH2857SU	2857	80,019	3000 x 5100 x 5230	3120 x 5220 x 5350	162	900 x 800

\*Custom Build Chambers also available | \* Models with Exterior powder coated GI sheet & Interior stainless steel (304) will be available on request.  
 Standard Inner Heights: 2.0, 2.4, 3.0 Mt | Standard Inner Width: 1.36, 2.0, 2.5, 4.0 Mt | Standard Inner Depths: 2.0,3.0, 4.0, 5.0 Mt


\* Newtronic reserve the rights to change the product specifications without prior notice.

Features	Ethernet	PLC Control	Touch Screen	Standby Cooling	Door Access	Alarms	Mobile Alert	E-mail Alert	Safety	Software	Documents


Temperature Range: 20°C to 60°C  
 Humidity Range: 40% Rh to 95% Rh

# ECOtronic Walk-In Stability Chamber


Patented Technology  
 No: 398204

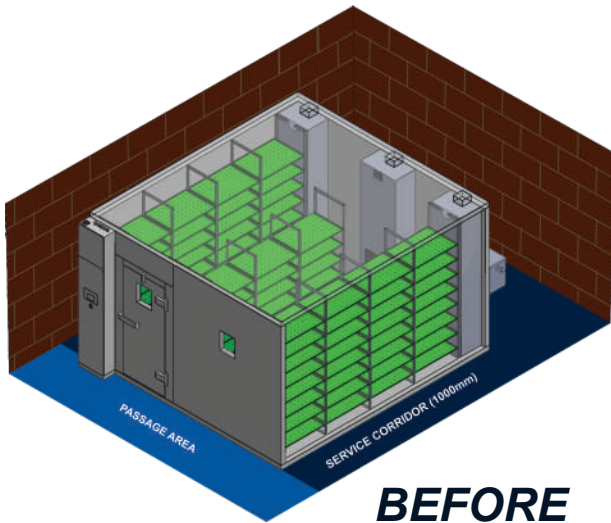

**BEFORE**

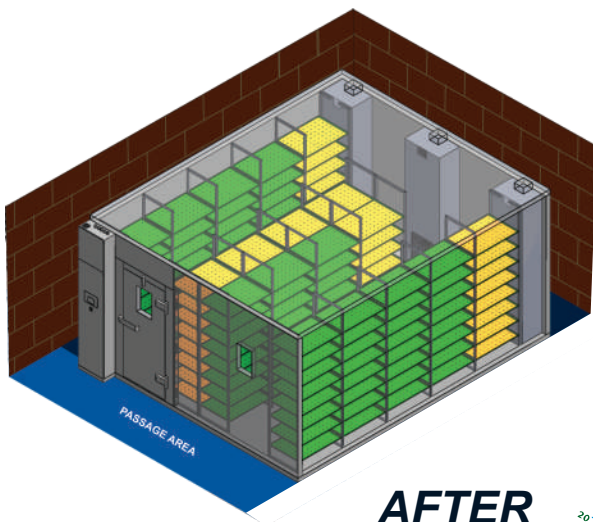


**AFTER**

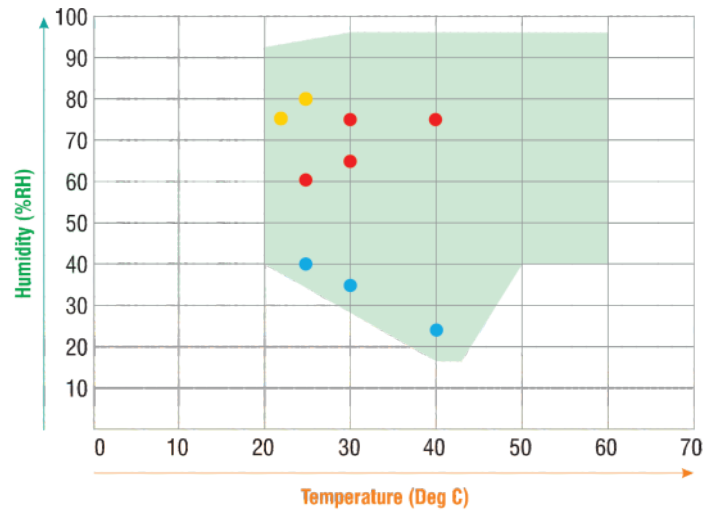

● General Conditions    ● Semi-permeable Conditions    ● MVTR and Other Special Conditions

## Psychrometric Chart

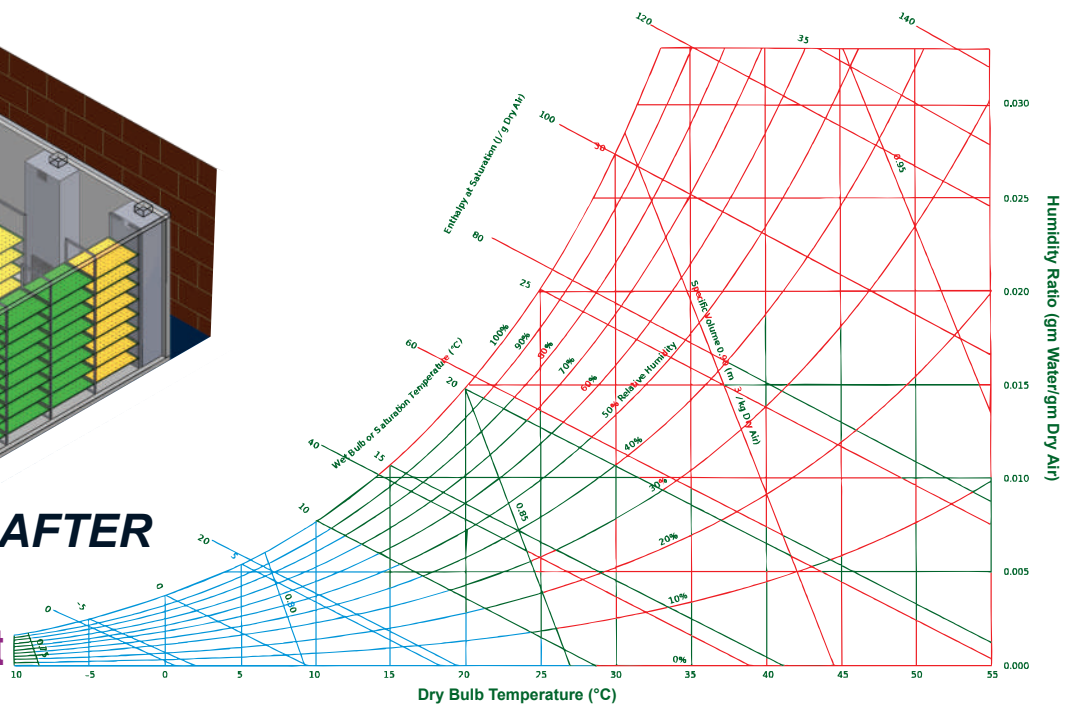

## Introducing a Patented Technology for Green Mode Energy Optimization




Based on Principles of Dew Point Control



Low Power & Water Consumption



More Storage Area



No short term Deviations



Less Breakdown

Temperature Range: -20°C to 50°C

# Freeze Thaw Chamber

Storage conditions must be distributed in a manner that ensures that the product quality will not be adversely affected. With the exception of short transit times within the same climatic zone, it is virtually impossible to validate a shipping method against all environmental conditions.

Therefore, distribution stability studies are designed to generate additional data and to complement preformulation development and routine (ICH Q1A(R2)) studies



## Standard Equipment

- Double walled with PUF insulation
- SS304 Interior & Exterior of Mild Steel
- Stainless Steel trays
- Metal door with gasket & lock on the outside
- Forced air circulation for uniform temperature
- PU wheels for easy movement
- U shaped SS tubular heaters
- CFC free cooling system consisting of hermetically sealed compressor coupled with evaporation coil & condenser
- Complete Operations driven through PLC with data logging capacity of upto 1000 readings
- High speed Ethernet based communication
- All operations through a single 7" Color Touch Screen
- High-quality PT-100 Temperature sensor
- Safety devices: High Temperature cut-off settable thermostats
- Audio/Visual alarms for deviations
- Complete with DQ, IQ, OQ, PQ & SOP & Operational Manual

**Power Supply:** 230 volts 50 Hz main supply. Also available with 60 Hz Cycle.

## Mode of Operation

- User can program a specific profile needed for their application to enable rapid simulation conditions & the need to replicate freezing & thawing during product testing
- Upto 4 temperatures set point can be set in cyclic mode.  
(eg. -20°C set for 48 hrs, 5°C for 24 hrs, 25°C for 72 hrs and 40°C for 120 hrs)  
No. of such temperature cycles can be repeated

## SPECIFICATIONS

- Temperature Range : -20°C to 50°C

## Optional Accessories


- ICDAS -A Single Software installation for all Newtronic make equipments
- Door Access system (Numeric or Biometric)
- Remote alarm system suitable for upto 4 nos. Newtronic make equipments
- Mobile Alert System

## ◆ Selection Guide

Model	Capacity		Internal Size (H*W*D) mm	External Size (H*W*D) mm	Trays Qty.	Trays Size (W*D) mm	Approx. Weight (Kg)	
	CuFt.	Liter					Equip.	Ship.
NLFT7MI	7	200	510 x 560 x 700	1500 x 720 x 880	2	540 x 605	250	390
NLFT11MI	11	300	910 x 560 x 590	1955 x 720 x 770	3	540 x 495	270	425
NLFT14MI	14	400	910 x 560 x 785	1955 x 720 x 965	3	540 x 690	280	445
NLFT25MI	25	700	1200 x 800 x 730	2120 x 960 x 1020	4	780 x 635	310	500
NLFT34MI	34	1050	1200 x 1200 x 730	2110 x 1360 x 1020	8	515 x 635	360	600
NLFT54MI	54	1500	1200 x 1500 x 830	2110 x 1660 x 1120	8	660 x 735	400	700

\* Newtronic reserve the rights to change the product specifications without prior notice.

Features

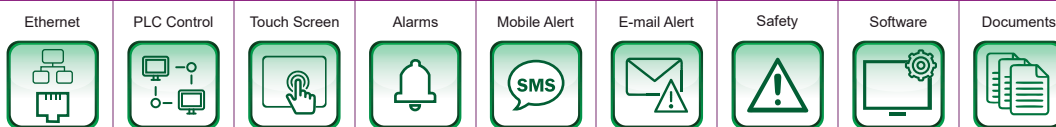

Upper Temperature Range: 2°C to 8°C  
 Lower Temperature Range: -10°C to -25°C

# Combo Refrigerator



## Standard Equipment

- Double wall PUF insulation
- Interior SS304 & Exterior PPGI
- Stainless Steel Trays in the upper compartment & Baskets in the lower compartment
- Doors with magnetic gasket for all airtight sealing
- Forced air circulation for uniform temperature
- PU Wheels for easy movement
- CFC free cooling system consisting of hermetically sealed compressor coupled with evaporation coil & condenser (one for each compartment)
- Complete operation are driven through IOT-enabled Controller with data logging capacity of upto 1000 readings
- High speed Ethernet based communication
- All operations through a single 7" Color Touch Screen Display
- High-quality PT-100 Temperature sensor
- Safety devices: Low Temperature cut-off settable thermostats
- Audio/Visual alarms for deviations
- Complete with DQ, IQ, OQ, PQ ,SOP & Operational Manual

**Power Supply:** 230 volts 50 Hz main supply. Also available with 60 Hz Cycle.

## Double the Output | Lower the Cost

### SPECIFICATIONS

- Upper Temperature Range : 2°C to 8°C
- Lower Temperature Range : -10°C to -25°C
- Upper Temperature Accuracy : ±0.5°C
- Lower Temperature Accuracy : ±3°C
- Upper Temperature Uniformity : ±1°C
- Lower Temperature Uniformity : ±5°C

### Optional Accessories

- ICDAS -A Single Software installation for all Newtronic make equipments
- Remote alarm system suitable for upto 4 nos. Newtronic make equipments
- Mobile Alert System

### ◆ Selection Guide

Model	Capacity		Internal Size (H*W*D) mm	External Size (H*W*D) mm	Trays/ Baskets Qty.	Approx. Weight (Kg)	
	CuFt.	Liter				Equip.	Ship.
NLCR17MIC	Upper - 7	Upper - 300	Upper - 765 x 625 x 630	2050 x 785 x 945	Upper - 3	285	450
	Lower - 7	Lower - 165	Lower - 440 x 625 x 600		Lower - 2		

\* Newtronic reserve the rights to change the product specifications without prior notice.



Temperature Range: 2°C to 8°C

# Laboratory Refrigerator (Cooling Cabinet)

## Standard Equipment

- Double walled with PUF insulation
- SS304 Interior & Exterior either SS304 or Mild Steel
- Stainless Steel trays
- Full-length inner glass door with magnetic gasket
- Forced air circulation for uniform temperature
- PU wheels for easy movement
- CFC free cooling system consisting of hermetically sealed compressor coupled with evaporation coil & condenser
- Complete Operations driven through IOT-enabled Controller with data logging capacity of upto 1000 readings
- High speed Ethernet based communication
- All operations through a single 7" Colour Touch Screen Display
- High-quality PT-100 Temperature sensor
- Safety devices: Low temperature cut-off settable thermostats
- Audio/Visual alarms for deviations
- Complete with DQ, IQ, OQ, PQ & SOP & Operational Manual

**Power Supply:** 230 volts 50 Hz main supply. Also available with 60 Hz Cycle.



## SPECIFICATIONS

- Temperature Range : 2°C to 8°C
- Temperature Accuracy : ± 0.5°C
- Temperature Uniformity : ± 1°C


## Optional Accessories

- ICDAS -A Single Software installation for all Newtronic make equipments
- 4 pt. Temperature Scanner
- Stand by Cooling System with auto switch over (430 litre & above)
- Door Access System (Numeric or Biometric)
- Remote alarm system suitable for upto 4 nos. Newtronic make equipments
- Mobile Alert System

## ◆ Selection Guide

Model	Capacity		Internal Size (H*W*D) mm	External Size (H*W*D) mm	Trays Qty.	Trays Size (W*D) mm	Approx. Weight (Kg)	
	CuFt.	Liter					Equip.	Ship.
NLCC7SI	7	200	800 x 500 x 500	1315 x 660 x 965	3	430 x 460	140	250
NLCC16SI	16	430	1200 x 600 x 600	1715 x 760 x 1105	4	530 x 560	235	350
NLCC26SI	26	735	1500 x 700 x 700	2070 x 860 x 1205	5	630 x 660	285	450
NLCC34SI	34	1000	1500 x 800 x 800	2070 x 960 x 1305	5	730 x 760	335	550
NLCC54SI	54	1500	1500 x 1600 x 600	2070 x 1760 x 1105	10	695 x 560	360	750
NLCC71SI	71	2000	1500 x 1600 x 800	2070 x 1760 x 1305	10	695 x 760	380	800

\* Newtronic reserve the rights to change the product specifications without prior notice.

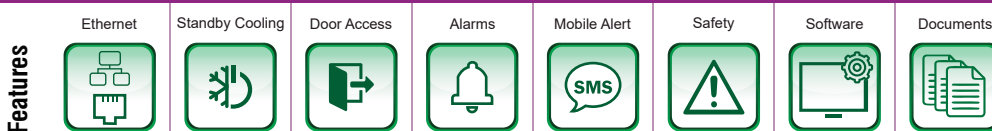

Temperature Range: 2°C to 8°C

# Pharmaceutical Refrigerator



## Standard Equipment

- Double walled with PUF insulation
- Mild Steel Exterior & Interior either SS304 or Mild Steel
- Powder coated wire mesh trays
- Full-length glass door with magnetic gasket
- Forced air circulation for uniform temperature
- Castor wheels for easy movement
- CFC free cooling system consisting of hermetically sealed compressor coupled with evaporation coil & condenser
- **Highly cost-effective models for storage of reagents, solvents and chemicals**
- I-Series: Models with 21 CFR part 11 connectivity | 1000 readings | Online print facility

OR

- E-Series: Auto tune PID controller | 2 line LED display
- High-quality PT-100 Temperature sensor
- Safety devices: Low temperature cut-off settable thermostats
- Audio/Visual alarms for deviations
- Complete with DQ, IQ, OQ, PQ & SOP & Operational Manual

**Power Supply:** 230 volts 50 Hz main supply. Also available with 60 Hz Cycle.

## Drain-Free Operations

### SPECIFICATIONS

- Temperature Range : 2°C to 8°C
- Temperature Accuracy :
- Temperature Uniformity :

### Optional Accessories


- ICDAS -A Single Software installation for all Newtronic make equipments

### ◆ Selection Guide

Model	Capacity		Internal Size (H*W*D) mm	External Size (H*W*D) mm	Trays Qty.	Approx. Weight (Kg)	
	CuFt.	Liter				Equip.	Ship.
NLPR7GI	7	200	825 x 490 x 495	1445 x 590 x 610	3	95	220
NLPR14GI	14	400	1000 X 600 X 670	1675 X 700 X 785	4	110	240
NLPR17GI	17	500	1200 X 600 X 695	1875 X 700 X 810	5	120	250
NLPR28GI	28	800	1250 X 1195 X 540	2030 X 1295 X 660	10	180	440
NLPR34GI	34	1000	1250 X 1195 X 670	2030 X 1295 X 790	10	200	450
NLPR54GI	54	1500	1250 x 1645 x 730	2030 x 1745 x 850	15	240	550

\* Newtronic reserve the rights to change the product specifications without prior notice.

Features



Temperature Range: 2°C to 8°C

# Walk-In Cold Room



Also Available

**Flameproof (Spark-free)**  
**FIREsafe**  
 Walk-In Cold room

## Standard Equipment

- Double walled with 60 mm PUF insulated modular panels with easy on-site assembly
- SS304 Interior & Exterior either SS304 or Pre Coated GI.
- Stainless Steel Trays
- Observation window - 450 x 300 mm
- Glass heater provided on the observation window
- PVC strip curtain for reducing temperature leakages
- Heater line along the door to avoid condensation
- Forced air circulation for uniform temperature
- CFC free cooling system consisting of hermetically sealed compressor coupled with evaporation coil & condenser
- System is made up of split type condenser unit in well-ventilated area to avoid throw of hot air in the room
- Complete Operations driven through IOT-enabled Controller with data logging capacity of upto 1000 readings
- High speed Ethernet based communication
- All operations through a single 7" Color Touch Screen Display
- High-quality PT-100 Temperature sensor
- Safety devices: Low temperature cut-off settable thermostat
- Audio/Visual alarms for deviations
- Complete with DQ, IQ, OQ, PQ & SOP & Operational Manual

**Power Supply:** 230/415 volts 50 Hz main supply. Also available with 60 Hz Cycle.

## SPECIFICATIONS

- Temperature Range : 2°C to 8°C
- Temperature Accuracy : ± 2°C
- Temperature Uniformity : ± 1°C

## Optional Accessories

- ICDAS -A Single Software installation for all Newtronic make equipments
- 8 pt. Temperature Scanner
- Stand by Cooling System with auto switch over
- Door Access system (Numeric or Biometric)
- Remote alarm system suitable for upto 4 nos. Newtronic make equipments
- Mobile Alert System

## ◆ Selection Guide

Model	Capacity		Internal Size (H*W*D) mm	External Size (H*W*D) mm	Trays Qty.	Trays Size (W*D) mm
	CuFt.	Liter				
NLWC208SI	208	5,848	2000 x 1360 x 2150	2120 x 1480 x 2270	20	900 x 300
NLWC250SI	250	7,017	2400 x 1360 x 2150	2520 x 1480 x 2270	28	900 x 300
NLWC307SI1	307	8,600	2000 x 2000 x 2150	2120 x 2120 x 2270	20	900 x 600
NLWC368SI1	368	10,320	2400 x 2000 x 2150	2520 x 2120 x 2270	28	900 x 600
NLWC543SI1	543	15,216	2400 x 2000 x 3170	2520 x 2120 x 3290	42	900 x 600
NLWC679SI	679	19,020	2400 x 2500 x 3170	2520 x 2620 x 3290	42	900 x 800
NLWC1092SI1	1092	30,600	2400 x 2500 x 5100	2520 x 2620 x 5220	70	900 x 800
NLWC1787SI	1787	50,040	3000 x 4000 x 4170	3120 x 4120 x 4290	126	900 x 600
NLWC2857SI	2857	80,019	3000 x 5100 x 5230	3120 x 5220 x 5350	162	900 x 800

\*Custom Build Chambers also available | \*Models with Exterior powder coated GI sheet & Interior stainless steel (304) will be available on request.

Standard Inner Heights: 2.0, 2.4, 3.0 Mt | Standard Inner Width: 1.36, 2.0, 2.5, 4.0 Mt | Standard Inner Depths: 2.0,3.0, 4.0, 5.0 Mt

\* Newtronic reserve the rights to change the product specifications without prior notice.

Features	Ethernet	IOT-enabled Controller	Touch Screen	Standby Cooling	Door Access	Alarms	Mobile Alert	E-mail Alert	Safety	Software	Documents

Temperature Range: -25°C to 0°C

## Deep Freezer



### Standard Equipment

- Double walled with PUF insulation
- SS304 Interior & Exterior of PPGI
- Stainless Steel baskets with Acrylic handles
- Metal Door with gasket & lock on the outside
- PU wheels for easy movement
- CFC free cooling system consisting of hermetically sealed compressor coupled with evaporation coil & condenser
- Complete operation are driven through IOT-enabled Controller with data logging capacity of upto 1000 readings
- High speed Ethernet based communication
- All operations through a single 7" Color Touch Screen Display
- High-quality PT-100 Temperature sensor
- Audio/Visual alarms for deviations
- Complete with DQ, IQ, OQ, PQ ,SOP & Operational Manual

**Power Supply:** 230 volts 50 Hz main supply. Also available with 60 Hz Cycle.

### SPECIFICATIONS

- Temperature Range : -25°C to 0°C
- Temperature Accuracy : ± 3°C
- Temperature Uniformity : ± 5°C

### Optional Accessories


- ICDAS -A Single Software installation for all Newtronic make equipments
- Door Access System (Numeric or Biometric)
- Remote alarm system suitable for upto 4 nos. Newtronic make equipments
- Mobile Alert System

**-40°C Plasma Freezers**  
Available on Request

### ◆ Selection Guide

Model	Capacity		Internal Size (H*W*D) mm	External Size (H*W*D) mm	Tray Qty.	Approx. Weight (Kg)	
	CuFt.	Liter				Equip.	Ship.
NLDF4MIC	4	110	440 x 415 x 600	980 x 595 x 765	2	120	215
NLDF7MIC	7	208	660 x 525 x 600	1310 x 705 x 765	3	200	350
NLDF11MIC	11	330	880 x 625 x 600	1503 x 805 x 765	4	220	370
NLDF14MIC	14	413	1100 x 625 x 600	1750 x 805 x 765	5	250	400
NLDF18MIC	18	503	1340 x 625 x 600	1990 x 805 x 765	6	300	525

\* Newtronic reserve the rights to change the product specifications without prior notice.

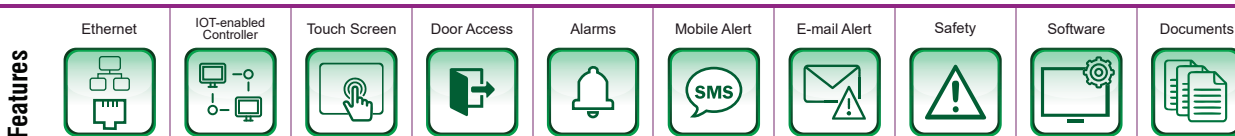

Temperature Range: -25°C to 0°C

# Walk-In Deep Freezer

## Standard Equipment

- Double walled with 125 mm PUF insulated modular panels with easy on-site assembly
- SS304 Interior & Exterior either SS304 or Pre Coated GI
- Stainless Steel Trays
- PVC strip curtain for reducing temperature leakages
- Forced air circulation for uniform temperature
- CFC free cooling system consisting of hermetically sealed compressor coupled with evaporation coil & condenser
- System is made up of split type condenser unit in well-ventilated area to avoid throw of hot air in the room
- **Mechanism for equalizing air-pressure for door opening from inside**
- **Complete water-drainage facility with drain point, trays & piping**
- Complete Operations driven through IOT-enabled Controller with data logging capacity of upto 1000 readings
- High speed Ethernet based communication
- All operations through a single 7" Color Touch Screen Display
- High quality PT-100 Temperature Sensor
- Audio/Visual alarms for deviations
- Complete with DQ, IQ, OQ, PQ & SOP & Operational Manual

**Ante Room at 2°C - 8°C**

**Power Supply:** 415 volts 50 Hz main supply. Also available with 60 Hz Cycle.




## SPECIFICATIONS

- Temperature Range : -25°C to 0°C
- Temperature Accuracy : ± 3°C
- Temperature Uniformity : ± 5°C


## Optional Accessories

- ICDAS -A Single Software installation for all Newtronic make equipments
- 8 pt. Temperature Scanner
- Stand by Cooling System with auto switch over
- Remote alarm system suitable for upto 4 nos. Newtronic make equipments
- Mobile Alert System

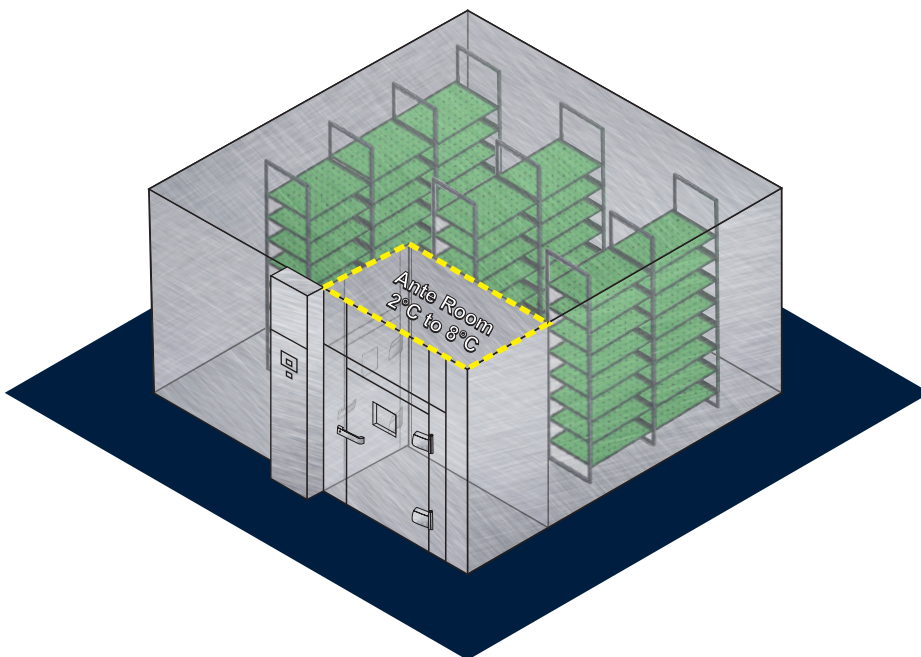

Walk-In Deep Freezers (with Ante Room) are designed and manufactured as per customer requirements.

\* Newtronic reserve the rights to change the product specifications without prior notice.

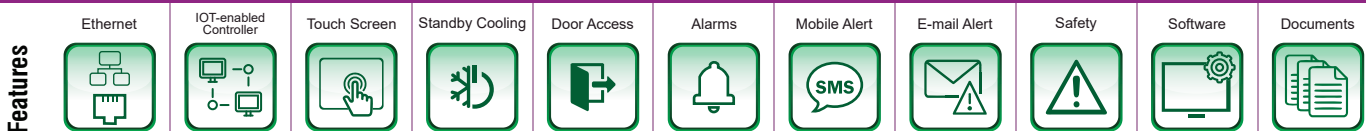

Temperature Range: -60°C to -86°C

# Ultra Low Temperature Freezer



## Standard Equipment

- SS304 Interior and Exterior is made of PCGI
- Interior is made up of multiple compartments with inner sub doors for each
- The inner doors are of SS304, low temperature tolerant, corrosion resistant and easy to clean
- All the six sides of the cabinet are made from high efficiency VIP PLUS vacuum thermal insulation plate
- Imported high efficiency compressor and EBM fans for energy saving and efficient refrigeration
- Vacuum release port to prevent vacuum formation and thus enable easy Door opening
- Low noise Design: Low noise direct cooling circuit; sound absorbing compartment and low noise fan
- Extended warm up time during power / freezer failure to provide sufficient time for carrying out backup plans
- Excellent uniformity under normal operating condition
- Fast recovery time upon resumption post door opening / power failure events
- Audio visual alarm notifications: High/Low Temperature excursions | Door Open
- Complete with DQ, IQ, OQ, PQ & SOP & Operational Manual

**Power Supply:** 230 volts 50 Hz main supply. Also available with 60 Hz Cycle.

## SPECIFICATIONS


- Temperature Range : -86°C to -60°C
- Temperature Accuracy :  $\pm 3^\circ\text{C}$
- Temperature Uniformity :  $\pm 7^\circ\text{C}$

## Optional Accessories

- External Data Logger for ICDAS connectivity
- ICDAS - A single software installation for all Newtronic make equipments
- Remote alarm system suitable for up to 4 nos. Newtronic make equipments
- Mobile Alert System

## ◆ Selection Guide

Model	Capacity		Internal Size (H*W*D) mm	External Size (H*W*D) mm	No. of Compartment	Approx. Weight (Kg)	
	CuFt.	Liter				Equip.	Ship.
NLUF04MI	04	100	514 x 450 x 439	820 x 1066 x 742	02	145	180
NLUF08MI	08	218	768 x 470 x 582	1555 x 862 x 976	02	205	260
NLUF14MI	14	398	1266 x 404 x 696	1947 x 788 x 1041	02	260	310
NLUF19MI	19	528	1266 x 585 x 696	1947 x 930 x 1041	02	300	350
NLUF27MI	27	778	1286 x 865 x 696	1955 x 1205 x 1025	03	365	425
NLUF36MI	36	1008	1378 x 1022 x 696	2002 x 1362 x 1025	04	426	550

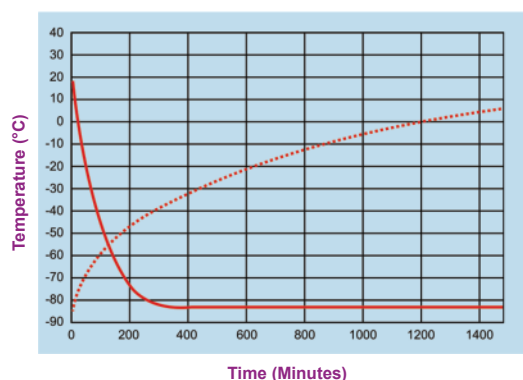


### LEGEND

- a Pull-down Time : ————
- a Warm-up Time : .....  
(upon power compressor failure)



\* Newtronic reserve the rights to change the product specifications without prior notice.

## Features

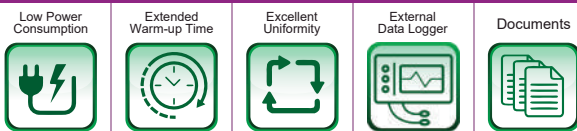

Temperature Range: 7°C (above ambient)  
to 50°C

## CO<sub>2</sub> Incubator

### Standard Equipment

- SS304 interior and exterior either SS304 or mild steel
- Tightly sealed inner door made of tempered safety glass
- Direct heating via heaters wound around the chamber
- Perforated SS304 shelves
- Humidification system with condensation protection
- Auto sterilization with hot air at 180°C along with Air Jacket formations
- Adjustable heat sterilization cycle
- Fan assisted air circulation to ensure superior uniformity, rapid recovery and minimum variation between cultures
- Complete prevention of desiccation - no matter where your cultures are
- Complete operations are driven through a PLC controlling system with a colour touch screen display
- Superior mixing of CO<sub>2</sub> gas via specially designed air flow patterns
- IR-based CO<sub>2</sub> sensor for CO<sub>2</sub> monitoring and controlling (upto 20%)
- Complete Operations driven through PLC with data logging capacity of upto 1000 readings
- Audio visual alarms for deviations



## For the best in class Mammalian Cell Growth

### SPECIFICATIONS

- Temperature Range : 7°C (above ambient) to 50°C
- CO<sub>2</sub> Range : 0 to 20%
- Temperature Accuracy : ± 0.1°C
- Temperature Uniformity : ± 0.5°C

### Optional Accessories


- ICDAS - A single software installation for all Newtronic make equipments
- Mobile Alert System

### ◆ Selection Guide

Model	Capacity	Capacity	Internal Size (H*W*D) mm	External Size (H*W*D) mm	Tray Qty.	Tray Size
	(Cu. Ft.)	(Ltr)				(W*D) mm
NLCO4MI	4	100	500 x 450 x 450	840 x 590 x 820	2	430 x 430
NLCO6MI	6	170	600 x 600 x 470	940 x 740 x 840	2	580 x 450

\* Newtronic reserve the rights to change the product specifications without prior notice.

Features



Temperature Range: 15°C to 60°C

# BOD Incubator (Cool Incubator)

## Standard Equipment

- Double walled with PUF insulation
- SS304 Interior & Exterior either SS304 or Mild Steel
- Stainless Steel trays
- Full length inner glass door with magnetic gaskets
- LED light for better illumination & observation (200 liters & above)
- Forced air circulation for uniform temperature
- PU wheels for easy movement
- U shaped SS tubular heaters
- Complete operation are driven through IOT-enabled Controller with data logging capacity of upto 1000 readings
- High speed Ethernet based communication
- All operations through a single 7" Colour Touch Screen Display
- High-quality PT-100 Temperature sensor
- Safety devices: Low & high temperature cut-off settable thermostats
- Audio/Visual alarms for deviations
- Complete with DQ, IQ, OQ, PQ ,SOP & Operational Manual

## With Refrigeration Technology

- CFC free cooling system consisting of hermetically sealed compressor coupled with evaporation coil & condenser

## Without Refrigeration Technology

- Cooling achieved by a thermoelectric module based on the principles of Peltier Technology

**Power Supply:** 230 volts 50 Hz main supply. Also available with 60 Hz Cycle.



## SPECIFICATIONS

- Temperature Range : 15°C to 60°C
- Temperature Accuracy : ± 0.5°C
- Temperature Uniformity : ± 1°C

## Optional Accessories

- ICDAS -A Single Software installation for all Newtronic make equipments
- 4 pt. Temperature Scanner
- Door Access system (Numeric or Biometric)
- Remote alarm system suitable for upto 4 nos. Newtronic make equipments
- Mobile Alert System


## ◆ Selection Guide

Model	Capacity		Internal Size (H*W*D) mm	External Size (H*W*D) mm	Trays Qty.	Trays Size (W*D) mm	Approx. Weight (Kg)	
	CuFt.	Liter					Equip.	Ship.
NLBI7SI	7	200	800 X 500 X 500	1315 x 660 x 965	3	430 X 460	-	-
NLBI16SI	16	430	1200 X 600 X 600	1715 x 760 x 1105	4	530 X 560	200	340
NLBI26SI	26	735	1500 X 700 X 700	2070 x 860 x 1205	5	630 X 660	270	450
NLBI34SI	34	1000	1500 X 800 X 800	2070 x 960 x 1305	5	730 X 760	325	550
NLBI54SI	54	1500	1500 X 1600 X 600	2070 x 1760 x 1105	10	695 X 560	350	750
NLBI71SI	71	2000	1500 X 1600 X 800	2070 x 1760 x 1305	10	695 X 760	360	800

\*To quote for Peltier Models, suffix your chosen model number with "P"

\* Newtronic reserve the rights to change the product specifications without prior notice.

Features



Temperature Range: 10°C to 60°C

# Walk-In Incubator

## Standard Equipment

- Double walled with 60 mm PUF insulated modular panels with easy on-site assembly
- SS304 Interior & Exterior either SS304 or Pre Coated G.I.
- Stainless Steel Trays
- Observation window - 450 x 300 mm
- PVC strip curtain for reducing temperature leakages
- Heater line along the door to avoid condensation
- U shaped SS tubular heaters
- Forced air circulation for uniform temperature
- CFC free cooling system consisting of hermetically sealed compressor coupled with evaporation coil & condenser
- System is made up of split type condenser unit in well-ventilated area to avoid throw of hot air in the room
- Complete Operations driven through IOT-enabled Controller with data logging capacity of upto 1000 readings
- High speed Ethernet based communication
- All operations through a single 7" Color Touch Screen Display
- High-quality PT-100 Temperature sensor
- Safety devices: Low & High temperature cut-off settable thermostats
- Audio/Visual alarms for deviations
- Complete with DQ, IQ, OQ, PQ, SOP & Operational Manual

**Power supply:** 230/415 volts 50 Hz main supply. Also available with 60 Hz Cycle.

## SPECIFICATIONS

- Temperature Range : 10°C to 60°C
- Temperature Accuracy : ± 0.5°C
- Temperature Uniformity : ± 1°C

## Optional Accessories

- ICDAS -A Single Software installation for all Newtronic make equipments
- 8 pt. Temperature Scanner
- Stand by Cooling System with auto switch over
- Door Access system (Numeric or Biometric)
- Remote alarm system suitable for upto 4 nos. Newtronic make equipments
- Mobile Alert System

## ◆ Selection Guide


Model	Capacity		Internal Size (H*W*D) mm	External Size (H*W*D) mm	Trays Qty.	Trays Size (W*D) mm
	CuFt.	Liter				
NLWI208SI	208	5,848	2000 X 1360 X 2150	2120 X 1480 X 2270	20	900 X 300
NLWI250SI	250	7,017	2400 X 1360 X 2150	2520 X 1480 X 2270	28	900 X 300
NLWI307SI	307	8,600	2000 X 2000 X 2150	2120 X 2120 X 2270	20	900 X 600
NLWI368SI1	368	10,320	2400 X 2000 X 2150	2520 X 2120 X 2270	28	900 X 600
NLWI543SI	543	15,216	2400 X 2000 X 3170	2520 X 2120 X 3290	42	900 X 600
NLWI679SI	679	19,020	2400 X 2500 X 3170	2520 X 2620 X 3290	42	900 X 800
NLWI1092SI	1092	30,600	2400 X 2500 X 5100	2520 X 2620 X 5220	70	900 X 800
NLWI1787SI	1787	50,040	3000 X 4000 X 4170	3120 X 4120 X 4290	126	900 X 600
NLWI2857SI	2857	80,019	3000 X 5100 X 5230	3120 X 5220 X 5350	162	900 X 800

\*Custom Build Chambers also available | \* Models with Exterior powder coated GI sheet & Interior stainless steel (304) will be available on request.

Standard Inner Heights: 2.0, 2.4, 3.0 Mt | Standard Inner Width: 1.36, 2.0, 2.5, 4.0 Mt | Standard Inner Depths: 2.0,3.0, 4.0, 5.0 Mt

\* Newtronic reserve the rights to change the product specifications without prior notice.

Features



Upper Temperature : 15°C to 60°C  
 Lower Temperature : 15°C to 60°C

# Dual Incubator



## Standard Equipment

- Double walled with PUF insulation
- SS 304 Interior & Exterior either SS 304 or Mild Steel
- Two separate Compartments operating at different temperature values
- Stainless Steel trays
- Full length inner glass door & outer metal door with gasket & lock on the outside
- Forced air circulation for uniform temperature
- PU wheels for easy movement
- U shaped SS tubular heaters
- Complete operation are driven through IOT-enabled Controller with data logging capacity of upto 1000 readings
- High speed Ethernet based communication
- All operations through a single 7" Colour Touch Screen Display
- High-quality PT-100 Temperature sensor
- Safety devices: Low & high temperature cut-off settable thermostats
- Audio/Visual alarms for deviations
- Complete with DQ, IQ, OQ, PQ ,SOP & Operational Manual

## With Refrigeration Technology

- CFC free cooling system consisting of hermetically sealed compressor coupled with evaporation coil & condenser

## Without Refrigeration Technology

- Cooling achieved by a thermoelectric module based on the principles of Peltier Technology

**Power Supply:** 230 volts 50 Hz main supply. Also available with 60 Hz Cycle.

## SPECIFICATIONS

- Temperature Range : 15°C to 60°C
- Temperature Accuracy : ± 0.5°C
- Temperature Uniformity : ± 1°C

## Optional Accessories

- ICIDAS -A Single Software installation for all Newtronic make equipments
- Remote alarm system suitable for upto 4 nos. Newtronic make equipments
- Mobile Alert System

## ◆ Selection Guide

Model	Capacity		Internal Size (H*W*D) mm	External Size (H*W*D) mm	Trays Qty.	Trays Size (W*D) mm	Approx. Weight (Kg)	
	CuFt.	Liter					Equip.	Ship.
NLDC14SI	Upper - 7	Upper - 200	Upper - 690 X 600 X 500	2060 x 740 x 985	Upper - 2	530 X 460	250	465
	Lower - 7	Lower - 200	Lower - 690 X 600 X 500		Lower - 2			
NLDC28SI	Upper - 14	Upper - 400	Upper - 690 X 700 X 800	2060 x 840 x 1285	Upper - 2	630 X 760	320	535
	Lower - 14	Lower - 400	Lower - 690 X 700 X 800		Lower - 2			

\*To quote for Peltier Models, suffix your chosen model number with "P"

\* Newtronic reserve the rights to change the product specifications without prior notice.

<b>Features</b>	Ethernet	Documents	Alarms	Mobile Alert	Safety	Software

Temperature Range: 5°C (above ambient) to 60°C

## Bacteriological Incubators



Temperature Range: 50°C to 280°C

## Laboratory Oven



### Standard Equipment

- Double walled with Rockwool insulation
- SS304 Interior & Exterior either SS304 or Mild Steel
- Mesh type Stainless Steel trays
- Forced air circulation for uniform temperature
- PU wheels for easy movement (for machines with capacity of 324L and above)
- SS tubular heaters
- I-Series: Models with 21 CFR part 11 connectivity | 1000 readings | Online print facility  
OR  
E-Series: Auto tune PID controller | 2 line LED display
- Ramp & soak facility
- High quality PT-100 Temperature Sensor
- Safety Device: High Temperature cut-off settable thermostats
- Audio/Visual alarms for deviations
- Complete with DQ, IQ, OQ, PQ, SOP & Operational Manual

**Power supply:** 230 volts 50 Hz main supply. Also available with 60 Hz Cycle.

### SPECIFICATIONS

### Optional Accessories

- **Bacteriological Incubators**  
Temperature Range: 5°C (above ambient) to 60°C
- **Laboratory Oven**  
Temperature Range: 50°C to 280°C
- ICDAS -A Single Software installation for all Newtronic make equipment

### ◆ Selection Guide

Model (Bacteriological Incubators)	Model (Laboratory Oven)	Capacity		Internal Size	External Size	Trays Qty.	Trays Size	Approx. Weight (Kg)	
		CuFt.	Liter	(H*W*D) mm	(H*W*D) mm		(W*D) mm	Equip.	Ship.
NLLI3SE	NLLO3SE	3	90	450 X 450 X 450	890 x 610 x 785	2	430 X 430	100	200
NLLI5SE	NLLO5SE	5	121	600 X 450 X 450	1040 x 610 x 785	2	430 X 430	110	220
NLLI8SE	NLLO8SE	8	216	600 X 600 X 600	1015 x 840 x 1020	2	560 X 560	125	250
NLLI12SE	NLLO12SE	12	324	900 X 600 X 600	1430 x 760 x 1050	3	560 X 560	150	280
-	NLLO16SE	16	430	1200 X 600 X 600	1715 x 760 x 1155	4	560 X 560	-	-
-	NLLO26SE	26	735	1500 X 700 X 700	2070 x 860 x 1255	5	660 X 660	-	-
-	NLLO34SE	34	1000	1500 X 800 X 800	2070 x 960 x 1355	5	760 X 760	-	-

\*Last 3 models of Laboratory Ovens have temperature range from 50°C to 110°C

\* Newtronic reserve the rights to change the product specifications without prior notice.

### Features



Temperature Range: 40°C to 200°C

# Vacuum Oven



## Standard Equipment

- The interior and the exterior of the chamber is made of stainless steel (SS304)
- Exterior made of PPGI is also available.
- Fitted with highly accurate controller that allows gentle drying of heat sensitive materials avoiding damage due to rapid temperature overshooting
- Considerable reduction in drying time | Dries faster than the conventional oven
- Separate vacuum connection valve preventing oil spilling in the oven
- Separate vacuum release valve releasing vacuum by gentle turning of the knob
- Calibrated Analog vacuum gauge
- The door is provided with silicon gasket & positive latch to maintain seal at all vacuum levels
- Door with glass window for viewing of the sample inside the chamber
- Heater mounted below the tray, ensures rapid & equal heating without any thermal loss
- I-Series: Models with 21 CFR part 11 connectivity | 1000 readings | Online print facility

OR

- E-Series: Auto tune PID controller | 2 line LED display
- High quality PT-100 Temperature Sensor
- Safety Device : Electromagnetic relay
- Audio/Visual alarms for deviation
- Complete with DQ, IQ, OQ, PQ ,SOP & Operational Manual

**Power supply:** 230 volts 50 Hz main supply. Also available with 60 Hz Cycle.

## SPECIFICATIONS

- Temperature Range : 40°C to 200°C

## Optional Accessories

- ICDAS -A Single Software installation for all Newtronic make equipments

## ◆ Selection Guide

Model	Capacity		Internal Size (H*W*D) mm	External Size (H*W*D) mm	Trays Qty.	Approx. Weight (Kg)	
	CuFt.	Liter				Equip.	Ship.
NLVO1SE	1	30	275 X 300 X 300	650 X 440 X 490	1	80	200

Also available : I-series Models with 21 CFR part 11 connectivity; ramp & soak facility and print facility

\* Newtronic reserve the rights to change the product specifications without prior notice.

Features	Alarms	Safety	Software	21 CFR Compliant

Temperature Range: 100°C to 125°C

# Autoclave

## Standard Equipment

- Unique Slim design with Outer Tank of SS304 and Inner Tank of SS316
- Insulated tank for better performance
- Top-Opening lid, with single lever mechanism and self-bulge seal rim
- PU wheels for easy movement
- Class A PT-100 **4pt. Scanner** for accurate control/monitoring
- All operations through a single 7" Color Touch Screen Display
- Complete operation are driven through IOT-enabled Controller with data logging capacity of upto 1000 readings
- 6 nos. of pre-loaded recipes (customizable)
- Safety valve for over pressure protection with automatic release of pressure
- Automatic shutdown upon completion of sterilization cycle with release of pressure
- Audio/Visual notification upon cycle completion
- Audio/Visual Alarms for low water level; Temperature deviations
- **FO value and Batch-wise Report**
- Safety Features: Over-pressure protection; Temperature Cut-off; emergency venting system and automatic pressure lever lock mechanism
- Complete with DQ, IQ, OQ, PQ & SOP & Operational Manual
- 21 CFR Part 11 Ready Software
- Traceable audit trails and alarm reports

**Power supply:** 230 volts 50 Hz main supply.



## SPECIFICATIONS

- Temperature Range : 100°C to 125°C
- Pressure Range : upto 2 bar (30 psi)
- Temperature Accuracy : ± 0.5°C


## Optional Accessories

- ICDAS -A Single Software installation for all Newtronic make equipments
- SS Wire Mesh Baskets

## ◆ Selection Guide

Model No	Capacity		Tank Size (Dia x D) mm	External Size (H x W x D) mm	Basket Size (Dia x D) mm	No. of Baskets
	CuFt.	Liter				
NLAC2SI	2	50	350 x 540	1025 x 785 x 485	300 x 500	1
NLAC3SI	3	100	450 x 630	1115 x 885 x 585	400 x 600	2
NLAC5SI	5	150	550 x 630	1170 x 990 x 690	500 x 300	2
					475 x 300	
NLAC7SI	7	200	550 x 850	1360 x 985 x 685	500 x 400	2
					475 x 400	

\* Newtronic reserve the rights to change the product specifications without prior notice.

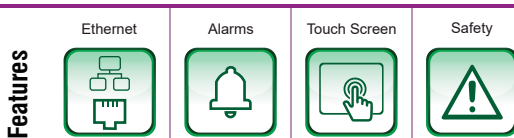

# Biological Safety Cabinet



## Standard Equipment

- Exterior available in PCGI or SS304
- Interior available in SS304 or SS316
- Single piece SS working table which can be easily removable for easy cleaning
- Multiple side-entry for Gas knobs
- 6mm Tempered Sliding Glass Door with counter-weight arrangement
- Intermediate pre filter (10 microns)
- H14 - HEPA Filter (99.97% down to 0.3 micron)
- Microprocessor based Controller
- UV light with real time status
- Optimal performance of air velocity, airflow and uniformity through dynamic balanced blower/motor
- State-of-the-art Display:
  - Sash status
  - Air Pressure
  - UV Light status
  - UV Burning Hours
  - HEPA status
  - Upflow and downflow status
- Audio & visual alarms for airflow, pressure and sash height
- When sash fully closes, UV light and blower activates

**Power supply:** 230 volts 50 Hz main supply.

Tested & Passed As Per  
**NSF Standards**

## AVAILABLE IN

- Class II A2
- Class II B2

## Optional Accessories

- Virus burn unit

## ◆ Selection Guide

Model Class II A2	Model Class II B2	Internal Size		External Size
		(W x D) ft	(H x W x D) mm	(H x W x D) mm
NLBS2A2	NLBS2B2	2' x 2'	610 x 610 x 610	2200 x 720 x 800
NLBS3A2	NLBS3B2	3' x 2'	610 x 915 x 610	2200 x 1030 x 800
NLBS4A2	NLBS4B2	4' x 2'	610 x 1220 x 610	2200 x 1330 x 800

\* Newtronic reserve the rights to change the product specifications without prior notice.

Features



# Laminar Air Flow Cabinet



## Standard Equipment

- Exterior available in PCGI or SS304
- Interior available in SS304 or SS316
- SS operation table and metal side baffle
- Compact design for Ultraclean dustfree environment
- Fully enclosed sides to create positive pressure inside the cabinet
- Intermediate pre filter (10 microns)
- H14 - HEPA Filter (99.97% down to 0.3 micron)
- UV light with real time status
- Optimal performance of air velocity, airflow and uniformity through dynamic balanced blower/motor
- State-of-the-art Display:
  - Sash status
  - Air Pressure
  - UV Light status
  - UV Burning Hours
  - HEPA status
  - Upflow and downflow status
- Audio & visual alarms for airflow and sash height
- Multiple side entry for Gas knob
- When sash fully closes, UV light and blower activates

**Power supply:** 230 volts 50 Hz main supply.

## AVAILABLE IN

- Horizontal
- Vertical

## ◆ Selection Guide

Model Horizontal		Model Vertical		Internal Size		External Size
				(W x D) ft	(H x W x D) mm	(H x W x D) mm
NLHL2S	NLHL2M	NLVL2S	NLVL2M	2' x 2'	610 x 610 x 610	2080 x 720 x 870
NLHL3S	NLHL3M	NLVL3S	NLVL3M	3' x 2'	610 x 915 x 610	2080 x 1030 x 870
NLHL4S	NLHL4M	NLVL4S	NLVL4M	4' x 2'	610 x 1220 x 610	2080 x 1330 x 870

\* Newtronic reserve the rights to change the product specifications without prior notice.

Features



# Introducing Remote View & Alarm System (RVAS)



# RVAS


Remote View & Alarm System

## Access Anywhere Anytime

Take Remote Monitoring to an in-depth level of information-sharing with NEWTRONIC's Remote View and Alarm System (RVAS).

### RVAS Features:

1. View & Acknowledge real-time T/RH reading of EACH sensor
2. View status of each I/O Components (humidifier, heater, compressor, etc)
3. View status of Utilities (Main Supply, Door, Water Level)

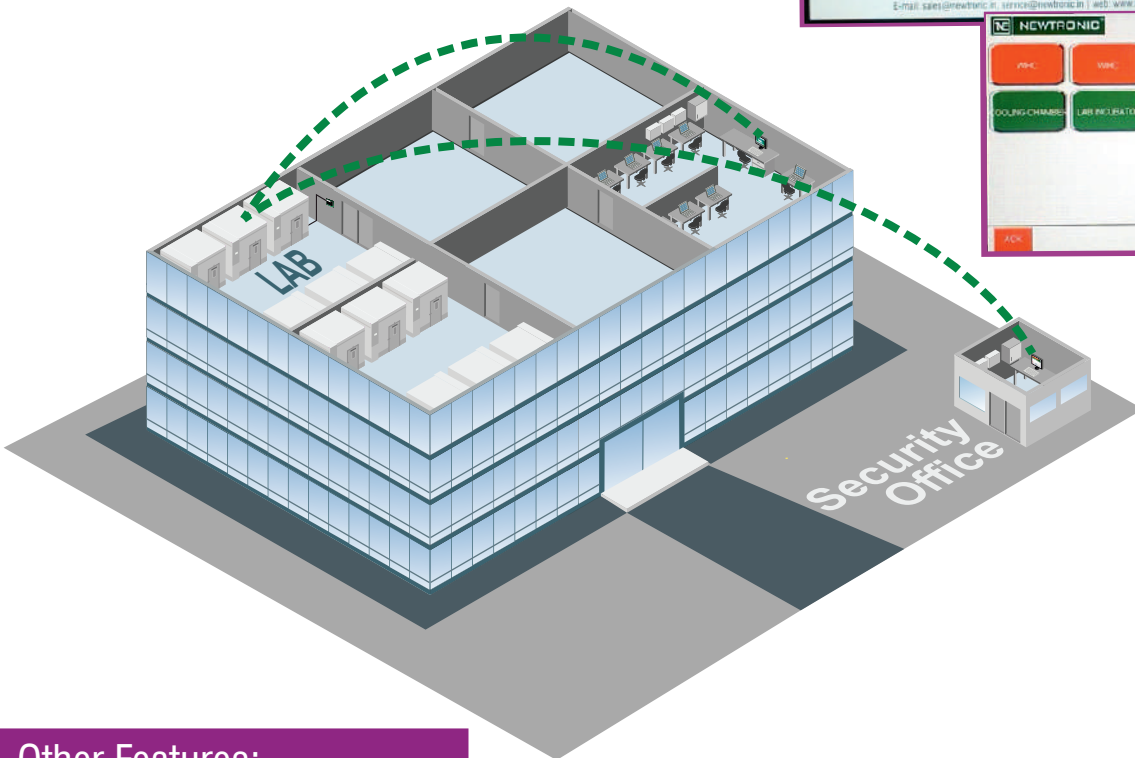

### Other Features:

- 7" colour touch screen display
- Connect upto 20 equipments on TCP/IP with on-site programming
- Eliminate the need for cabling
- Audio hooter & Visual display to notify alarms & deviations
- Department-wise segregation of users & chambers
- System Diagnosis
- IQ, OQ protocols




Real Time



Alerts 24/7



Alerts Groups



Multiple Interfaces


# ICDAS - Web-based 21 CFR Part 11 Software



## Access Anywhere Anytime

NEWTRONIC's ICDAS software changes the landscape of Stability Operations & Chamber Management. While it very effectively complies to the requirements of 21 CFR Part 11, it also meets the increasing demands for improved operational efficiencies. This server-based software gives the flexibility to operate the chambers remotely through any web browser and gives additional capabilities of going Paperless and system-based alert notifications of pending tasks.

## Software Architecture

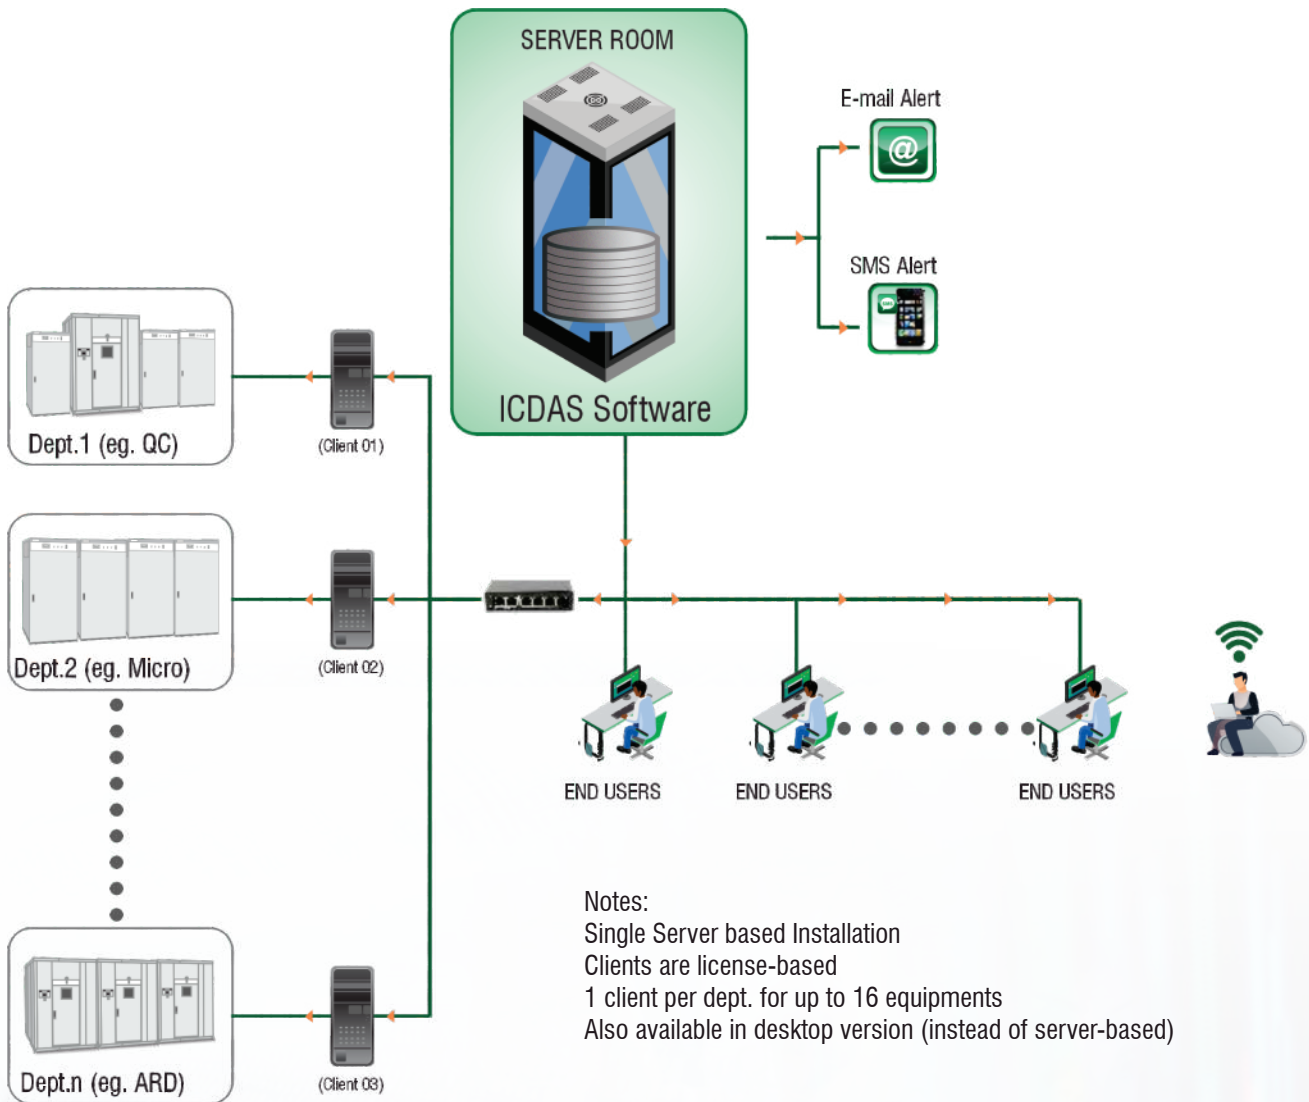

NLEPL/ICDAS/0326/4.2



Ever-ready for surprise audits



Multilingual



Restricted Access Rights & Privileges



Seamless Configuration




Go Paperless



Date & Timestamp Audit Trails

# Fast | Simple | Economical | Reliable

# ALCOA+

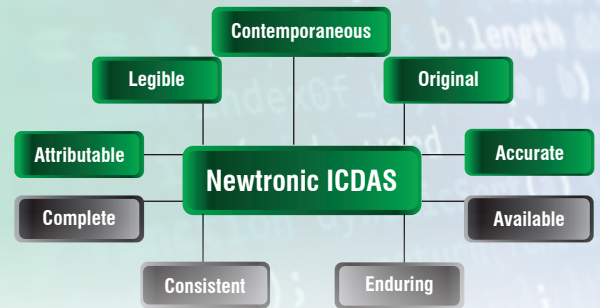

Instantly connect and control your chambers from anywhere without installing software.

## Key Features



### Installation

- Cloud-based Software accessible through Browser
- **Installation that is one-time for Lifetime!** Eliminate the need for multiple software installation & qualifications!



### Data Management

- **GO PAPERLESS!!** e-Review, e-Approval, e-Signature, e-Comments of:  
**Data Logs | Alarms | Audit Trails**
- Multi-level data authorization (through e-review & e-approval)
- Comprehensive Audit Trails of Alarms, User activity, Equipment settings, email & SMS generation
- **Stay Audit-Ready every single day through Supervisory Email facility!**
- Run-time calculation of MKT & MKRh
- Real-time display of all connected equipment in single screen



### Configuration

- Configure multiple user-groups (Operator, Supervisor, Admin, etc)
- Department-wise segregation of users, equipment & data
- Plant-wide harmonization of reporting format (header, footer, etc.)
- Configure the type & no. of alarms to be sent via email/SMS & configure delay time too



### Safe & Secure

- Automatic & Manual daily data backup facility. Automatic data backup can be done both, remotely & locally
- Additional features of Data Archival & Data Restore



### Other Features

- Viewing I/O Status & Running Hours of all major components. Component running hours to determine the shelf-life of major components
- Centralized user-defined Alarms, Alerts & Notifications through SMS & emails
- System Diagnosis for troubleshooting via Team Viewer
- **Document Library | e-SMS | Alarm recording in secs (subject to hardware compatibility)**



### LDAP

- **LDAP (Light-weight Directory Access Protocol) Integration: Access ICDAS through your corporate email id/password**




# Introducing Cloud-based Software (MEGVID)

# megvid

मेघ (Cloud) विद्या (Knowledge)



## Software Architecture

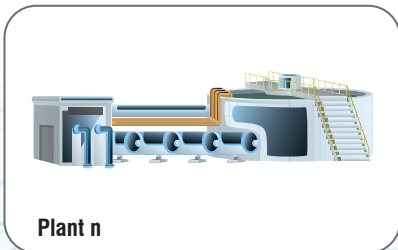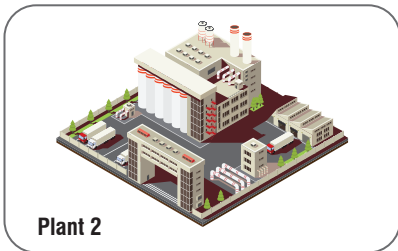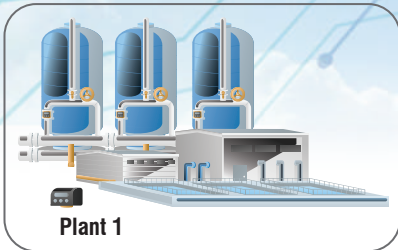

END USERS



END USERS



END USERS



Ever-ready for surprise audits



Seamless Configuration



Go Paperless



Multi Lingual



Restricted Access Rights & Privileges



Date & Timestamp Audit Trails



Documentation Library

# Support & Services

**Timely Servicing of Chambers increases the life and performance of Stability Chambers. Newtronic has a highly dedicated and up to date trained staff for the services of our clients.**

## Services Offered

- ◆ Annual Maintenance Contract (Preventive Maintenance; Breakdown; Calibration/Validation)
- ◆ Comprehensive Maintenance Contract (AMC + Free replacement of spares\*)
- ◆ Upgradations
- ◆ Third-Party Upgradations/Contract
- ◆ Tech Support (21 CFR Part 11 Software; PLC)
- ◆ Support for all kinds of Regulatory Audits (USFDA; MHRA; EU-GMP; WHO; etc.)


## Strengths

- ◆ Global presence of 150+ engineers and counting!
- ◆ Engineers with comprehensive expertise across refrigeration, electronics, mechanics, and software domains.
- ◆ NABL Accredited Lab (CC-4046)
- ◆ Global TAT of 24 hours
- ◆ 24/07 Online Support
- ◆ PAN-India Branch Network — For a complete list of our locations, please refer to the back cover or visit our website.
- ◆ Regional stocking of critical spares.
- ◆ Audit Support and justification to audit observations.
- ◆ International Service Support across 55+ countries.
- ◆ Documentation
- ◆ Globally 6000+ Contracts & counting!
- ◆ 97% Repeat Customer base

\* Spares offered under free replacement are limited in nature. Contact your support executive for more details



# Internationally proven innovative product range

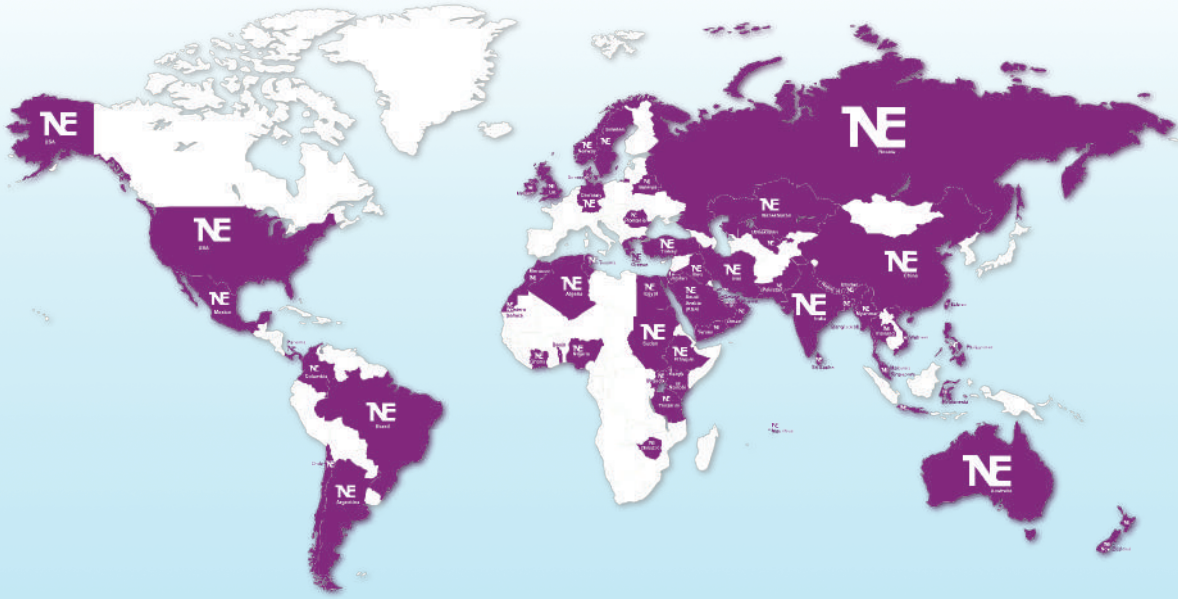

NLEPL/PRC/0326/4.2



## Newtronic Service Centers:

### Domestic:

Ahmedabad    Hyderabad / Vizag  
 Baddi            Indore  
 Bangalore    Kolkata / Sikkim  
 Chennai        Mumbai  
 Delhi            Pune  
 Goa              Vadodara

### International:

Algeria	Indonesia	Mexico	Singapore
Argentina	Iran	Morocco	Sri Lanka
Australia	Iraq	Nepal	Thailand
Bangladesh	Jordan	New Zealand	Turkey
Bahrain	Kazakhstan	Nigeria	Uganda
China	KSA	Oman	UK
Egypt	Latin America	Philippines	USA
Ethiopia	Malaysia	Russia	Vietnam

[service@newtronic.in](mailto:service@newtronic.in)

[service.exports@newtronic.in](mailto:service.exports@newtronic.in)

\* Newtronic reserve the right to change product specifications without prior notice



*The name you can trust*

**NEWTRONIC LIFECARE EQUIPMENT PVT. LTD.**

ISO 9001:2015 | ISO 13485:2016 | NABL ISO/IEC 17025:2005

### Email:

**India** : [sales@newtronic.in](mailto:sales@newtronic.in)  
**International** : [exports@newtronic.in](mailto:exports@newtronic.in)

**Whatsapp No.:** +91 82918 21223

**Visit us on** : [www.newtronic.in](http://www.newtronic.in)

### H.O.:

Kanakia Wall Street, A- Wing-612 Unit,  
 6th Floor, Chakala, Andheri Kurla Road,  
 Nr.Chakala Metro Station, Andheri (East),  
 Mumbai- 400093. India  
 T: +91 22 6853 4600

### Plant:

Plot No-1205 & 1206,  
 G.I.D.C. Ind. Estate, Road No.: 13,  
 Umbergaon- 396171, Dist.-Valsad,  
 Gujarat, India.